

UNCLASSIFIED

AD NUMBER

AD485279

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; JUL 1966. Other requests shall be referred to Arnold Engineering Development Center, Arnold AFS, TN. This document contains export-controlled technical data.

AUTHORITY

AFFDL ltr, 20 Dec 1974

THIS PAGE IS UNCLASSIFIED

AEDC-TR-66-136

ARCHIVE COPY  
DO NOT LOAN



## AN INVESTIGATION OF VARIOUS TYPES OF DECELERATORS AT MACH NUMBER 2.8

D. A. MacLanahan, Jr.

ARO, Inc.

OFFICE OF U. S. AIR FORCE  
AEDC LIBRARY  
AF 40(600)1200

July 1966

This document is not to be released for public release  
its distribution is limited.

PER TAB 74-26, 1974  
Dtd 20 Dec, 1974

This document is subject to special export controls  
and each transmittal to foreign governments or foreign  
nationals may be made only with prior approval of  
AFFDL.

**PROPULSION WIND TUNNEL FACILITY  
ARNOLD ENGINEERING DEVELOPMENT CENTER  
AIR FORCE SYSTEMS COMMAND  
ARNOLD AIR FORCE STATION, TENNESSEE**

AEDC TECHNICAL LIBRARY



5 0720 00031 3249

# *NOTICES*

When U. S. Government drawings specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified users may obtain copies of this report from the Defense Documentation Center.

References to named commercial products in this report are not to be considered in any sense as an endorsement of the product by the United States Air Force or the Government.

AN INVESTIGATION OF VARIOUS TYPES OF  
1. DECELERATORS AT MACH NUMBER 2.8

2. *Ballutes*

3. *Parachutes*

1-15

D. A. MacLanahan, Jr.

ARO, Inc.

This document has been approved for public release  
 its distribution is unlimited. *PER TAB 374-26  
 DIA 20 DEC, 1974*

This document is subject to special export controls  
 and each transmittal to foreign governments or foreign  
 nationals may be made only with prior approval of  
 AFSDL.

## FOREWORD

The work reported herein was done at the request of and for the Air Force Flight Dynamics Laboratory (AFFDL), Air Force Systems Command (AFSC), under Program Element 62405364, Project 6065, Task 606507.

The results of the test were obtained by ARO, Inc. (a subsidiary of Sverdrup & Parcel and Associates, Inc.), contract operator of the Arnold Engineering Development Center (AEDC), AFSC, Arnold Air Force Station, Tennessee, under Contract AF40(600)-1200. The test was conducted from May 11 to 14, 1966, under ARO Project No. PS0656, and the manuscript was submitted for publication on June 23, 1966.

This technical report has been reviewed and is approved.

Theodore E. Workman  
Major, USAF  
AF Representative, PWT  
DCS/Test

Leonard T. Glaser  
Colonel, USAF  
DCS/Test

**ABSTRACT**

A test was conducted in the 16-ft supersonic wind tunnel to obtain deployment and steady-state drag, inflation, and stability characteristics of a metal ballute, a cloth ballute, a cloth ballute with a burble fence, a parasonic parachute, and a hyperflo parachute. All decelerators were tested at a Mach number of 2.8 at a dynamic pressure of 120 psfa. The parachutes were also tested at Mach numbers of 2.9 and 3.0 at a dynamic pressure of 120 psfa. The data obtained show that a method of pre-inflation utilizing a methyl alcohol/water solution reduced the time required for the drag load to reach the steady-state value. This reduction of time permitted the metal ballute to attain full inflation.

This document has been approved for public release  
its distribution is unlimited. *PERTAB 14-26, 1974*  
*DTJ 20 Dec, 1974*

## CONTENTS

	<u>Page</u>
ABSTRACT. . . . .	iii
NOMENCLATURE. . . . .	vi
I. INTRODUCTION . . . . .	1
II. APPARATUS	
2.1 Test Facility. . . . .	1
2.2 Test Article . . . . .	1
2.3 Instrumentation. . . . .	3
III. PROCEDURE. . . . .	3
IV. RESULTS AND DISCUSSION	
4.1 Deployment Loads . . . . .	4
4.2 Steady-state Loads . . . . .	4
4.3 Inflation and Stability Characteristics. . . . .	5
V. CONCLUDING REMARKS . . . . .	6

## ILLUSTRATIONS

Figure

1. Model Centerbody Dimensions . . . . .	7
2. Location of Model in Test Section	
a. Ballute . . . . .	8
b. Parachute . . . . .	9
3. Installation of Model Centerbody in Test Section . . . . .	10
4. Three-Quarter Rear View of Model Centerbody . . . . .	11
5. Ballute Details	
a. Metal Ballute . . . . .	12
b. Cloth Ballute . . . . .	13
c. Cloth Ballute with Burble Fence . . . . .	14
6. Cloth Ballute with Burble Fence . . . . .	15
7. Parasonic Parachute Details. . . . .	16
8. Hyperflo Parachute Details . . . . .	17
9. Hyperflo Parachute. . . . .	18
10. Decelerator Deployment Characteristics	
a. Metal Ballute . . . . .	19
b. Cloth Ballute . . . . .	19
c. Cloth Ballute with a Burble Fence . . . . .	20
d. Parasonic Parachute . . . . .	20

<u>Figure</u>		<u>Page</u>
11.	Effect of Mach Number on Parachute Drag Coefficient. . . . .	21
12.	Pressure-Time and Temperature-Time Histories for the Metal Ballute . . . . .	22

## TABLE

I.	Summary of Test Conditions and Results. . . . .	23
----	---	----

## NOMENCLATURE

$A_e$	Parachute exit area, sq ft
$A_i$	Parachute inlet area, sq ft
$C_{D_0}$	Decelerator drag coefficient, $F_D/q_\infty S_0$
$F_D$	Decelerator drag force
$M_\infty$	Free-stream Mach number
$p_i$	Ballute internal pressure, psf
$q_\infty$	Free-stream dynamic pressure, psfa
$\dot{S}_0$	Decelerator drag-producing area <ul style="list-style-type: none"> <li>a. Metal ballute, 19.635 ft<sup>2</sup></li> <li>b. Cloth ballute with burble fence, 28.274 ft<sup>2</sup></li> <li>c. Cloth ballute, 19.635 ft<sup>2</sup></li> <li>d. Parachutes, 12.566 ft<sup>2</sup></li> </ul>
$T_i$	Ballute internal temperature, °F
$T_t$	Free-stream total temperature, °F



## SECTION I INTRODUCTION

A test was conducted in the 16-ft supersonic tunnel (Propulsion Wind Tunnel, Supersonic (16S)) of the Propulsion Wind Tunnel Facility (PWT) to determine the steady-state drag, inflation, and stability characteristics of two types of aerodynamic decelerators in supersonic flows. The decelerators investigated during this test were three conical ballutes and two parachutes. All of the decelerators were tested at a nominal Mach number of 2.8 at a nominal free-stream dynamic pressure of 120 psfa. The parachutes were additionally tested at nominal Mach numbers of 2.9 and 3.0 at a free-stream dynamic pressure of 120 psfa.

## SECTION II APPARATUS

### 2.1 TEST FACILITY

Tunnel 16S is a closed-circuit, continuous flow wind tunnel currently capable of operating at Mach numbers from 1.65 to 3.20. The tunnel is capable of operating over a stagnation pressure range from about 350 to 1600 psfa, depending upon Mach number. The test section stagnation temperature can be controlled through an approximate range of from 150 to 430°F. The wind tunnel specific humidity is controlled by removing tunnel air and supplying makeup air from an atmospheric dryer. A more complete description of the facility and its operating characteristics is contained in the Test Facilities Handbook.<sup>1</sup>

### 2.2 TEST ARTICLE

#### 2.2.1 Model Centerbody and Deployment System

The decelerators tested during this investigation were deployed from a strut-mounted centerbody. Dimensions of the centerbody are presented in Fig. 1, and the location of the centerbody in the wind tunnel is shown

---

<sup>1</sup>Test Facilities Handbook (5th Edition). "Propulsion Wind Tunnel Facility, Vol. 3." Arnold Engineering Development Center, July 1963.

in Fig. 2. The wind tunnel installation of the centerbody is shown in Fig. 3.

The ballutes were packed in the aft end of the centerbody and deployed with a drogue parachute. The parachutes were packed in the aft end of the centerbody on a spring-loaded plate. They were held against the plate by retaining straps which were released by a squib-fired release pin mechanism. A three-quarter rear view of a parachute packed in the aft end of the centerbody is shown in Fig. 4.

The ballute riser line was affixed to the centerbody by a cable with a load cell in series. The parachute riser line was similarly affixed to the centerbody, but a swivel was used to prevent twisting of the parachute suspension lines. A shear pin designed to protect the load cell was used to connect the riser line to the cable.

### 2.2.2 Decelerators

The decelerators tested were of three general types: ballutes, hyperflo parachute, and parasonic parachute. Specific construction details and photographs of the decelerators are shown in Figs. 5 through 9.

The 5-ft-diam metal ballute and the 5-ft-diam cloth ballute were constructed of woven stainless steel and Nomex<sup>®</sup>, respectively. These were 80-deg conical ballutes with four side-ram-air inlets. The dimensions of these ballutes are shown in Figs. 5a and b.

The 6-ft-diam cloth ballute was constructed of nylon. This ballute was an 80-deg conical ballute with four side-ram-air inlets with a 10 percent burble fence. The dimensions are shown in Fig. 5c, and a photograph is shown in Fig. 6.

An inflation device was incorporated in all of the ballutes. The normal inflation, made through the use of the four ram-air inlets, was augmented by the rapid vaporization of a methyl alcohol/water solution which was released inside the ballute upon deployment. At the internal pressure anticipated, the internal temperature was high enough to cause the alcohol/water solution to vaporize.

The 4-ft-diam parasonic parachute was constructed of nylon with a Dyna-Therm<sup>®</sup> coating on the canopy. This parachute had a mesh roof and skirt constructed of 0.25-in. webbing and 8.6-in. -wide fabric, respectively. The total porosity of this parachute was approximately 5 percent with an inlet-to-exit area ratio of 7.0. Further details and dimensions are shown in Fig. 7.

The 4-ft-diam hyperflo parachute was constructed of Nomex. Only the roof panel was coated with Dyna-Therm. This parachute had a mesh roof and skirt constructed of 0.25-in. webbing and 9.6-in. -wide fabric, respectively. The total porosity of the hyperflo parachute was approximately 5.6 percent. It had an inlet-to-exit area ratio of 7.0. Further details and dimensions are shown in Fig. 8, and a photograph is shown in Fig. 9.

### 2.3 INSTRUMENTATION

A 5000-lb capacity, double-element load cell was used to measure the drag load of the decelerators to within  $\pm 7$  lb for the range of drag loads measured during these tests. A direct writing oscillograph was used to monitor the decelerator drag load during testing. Five motion-picture cameras and two television cameras, installed in the test section walls, were used to document and monitor these tests.

The internal pressure on the first two ballutes was measured with a model-mounted, 5-psid transducer. The internal pressure of the metal ballute was measured with a model-mounted, 15-psid transducer.

The internal temperature of the metal ballute was measured by Chromel<sup>®</sup>-Alumel<sup>®</sup> thermocouples.

## SECTION III PROCEDURE

A decelerator was packed in the aft end of the strut-mounted center-body before the wind tunnel test operation was initiated. Once test conditions were established, the decelerator was ejected from the center-body into the airstream. Motion pictures, dynamic drag data, dynamic pressure data, and dynamic temperature data were obtained during and after each deployment. Upon completion of the decelerator deployment sequence, a steady-state drag load was calculated by averaging the analog output signal from the strain-gage load cell over a 1-sec interval.

All of the decelerators were deployed at a nominal Mach number and free-stream dynamic pressure of 2.8 and 120 psfa, respectively. After deployment, additional data were obtained for the two parachutes at Mach numbers of 2.9 and 3.0. The centerbody was maintained at zero angle of attack and yaw for the entire test. A complete summary of the test conditions is presented in Table I.

## SECTION IV

### RESULTS AND DISCUSSION

Five decelerator deployments were made at a Mach number of 2.8 and a free-stream dynamic pressure of 120 psfa. Deployment and inflation data were obtained from all of the decelerators except the hyperflo parachute, which failed to completely separate from the deployment bag. A strap from the deployment bag encircled the riser lines during the entire test, thus causing the parachute to become partially reefed. Steady-state data were obtained for all decelerators at a Mach number of 2.8 and a free-stream dynamic pressure of 120 psfa. Additional data were obtained at Mach numbers 2.9 and 3.0 for both of the parachute configurations. A summary of the test results is presented in Table I.

#### 4.1 DEPLOYMENT LOADS

Deployment of trailing aerodynamic decelerators generally creates two forces known as "snatch force" and "opening shock force." For wind tunnel testing of decelerators, the snatch force is defined as that force imposed on the centerbody by the deceleration of the mass of the decelerator from its velocity at line extension to zero velocity relative to the centerbody. The snatch force is followed closely by the opening shock force, which is defined as that force imposed on the centerbody by the sudden inflation of the decelerator at full line extension.

The snatch force and the opening shock force were found to vary considerably during each decelerator deployment since they are a function of the decelerator packing procedure. The deployment time histories are shown in Fig. 10.

The snatch force for the metal ballute, the cloth ballute, and the cloth ballute with a burble fence was 2200, 1140, and 1395 lb, respectively. The ballutes exhibited no opening shock force because a finite amount of time is required for inflation. The snatch and opening shock forces for the parasonic parachute were 930 and 650 lb, respectively.

#### 4.2 STEADY-STATE LOADS

The drag coefficient for each of the aerodynamic decelerator configurations is presented in Table I. The drag coefficients for the ballutes at  $M_\infty = 2.8$  varied from 0.689 to 0.733. The corresponding drag coefficients for the parasonic and hyperflo parachutes were 0.135 and 0.218, respectively. It is believed that the higher drag coefficient obtained with

the hyperflo parachute was a result of parachute design. The hyperflo parachute has a larger inflated diameter than the parasonic parachute of the same area ratio and nominal diameter. The slightly higher porosity of the hyperflo parachute is another factor contributing to the higher drag coefficient. The effect of reefing (caused by incomplete deployment) of the hyperflo parachute should, however, decrease the drag loads.

The effect of Mach number on parachute drag coefficient is shown in Fig. 11. In the test range, the drag coefficient for the parasonic parachute shows little change with Mach number. The hyperflo parachute shows a decrease in drag coefficient with increasing Mach number.

#### 4.3 INFLATION AND STABILITY CHARACTERISTICS

Photographic coverage obtained by motion-picture cameras permitted the determination of decelerator inflation and stability characteristics. The ballutes were equipped with a method of inflation utilizing a methyl alcohol/water solution to decrease the time required for inflation.

The cloth ballute and the metal ballute attained full inflation approximately 0.60 and 0.46 sec, respectively, after full line extension. The cloth ballute with a burble fence, being of a larger size, required about 0.77 sec to attain full inflation after full line extension. The fully inflated ballute exhibited no oscillation.

At similar test conditions, an identically sized cloth ballute with a burble fence from a previous test attained full inflation about 1.26 sec after full line extension. All inflatable metal ballutes previously tested at PWT have failed upon deployment.

Pressure-time and temperature-time histories for the metal ballute are shown in Fig. 12. This plot shows the temperature drop within the ballute caused by the vaporization of the alcohol/water solution with the corresponding rise in the internal ballute pressure.

The parasonic parachute attained full canopy inflation approximately 0.015 sec after full line extension. The fully inflated canopy exhibited an oscillation of approximately  $\pm 7.0$ ,  $\pm 4.5$ , and  $\pm 8.0$  deg at Mach numbers 2.8, 2.9, and 3.0, respectively. This oscillation was in a plane that is perpendicular to the centerline of the centerbody. The frequency of oscillation was greatest at Mach number 3.0. The hyperflo parachute, once inflated, exhibited an oscillation of 17.0 deg at Mach number 2.8.

## SECTION V CONCLUDING REMARKS

Tests were conducted to obtain deployment, inflation, and stability characteristics of three ballutes and two parachutes. All decelerators were tested at Mach number 2.8 at a dynamic pressure of 120 psfa. The parachutes were also tested at Mach numbers of 2.9 and 3.0 at a dynamic pressure of 120 psfa.

All of the ballutes inflated fully and exhibited excellent stability. Both parachutes exhibited some oscillation. The parasonic parachute showed better stability than the hyperflo parachute. The parasonic parachute was more stable for Mach numbers of 2.8 and 2.9 than for a Mach number of 3.0.

A pre-inflation method utilizing a methyl alcohol/water solution reduced the time required for the drag loads to reach the steady-state value. The reduction in time required for the ballute to inflate permitted the metal ballute to remain intact throughout deployment and inflation.


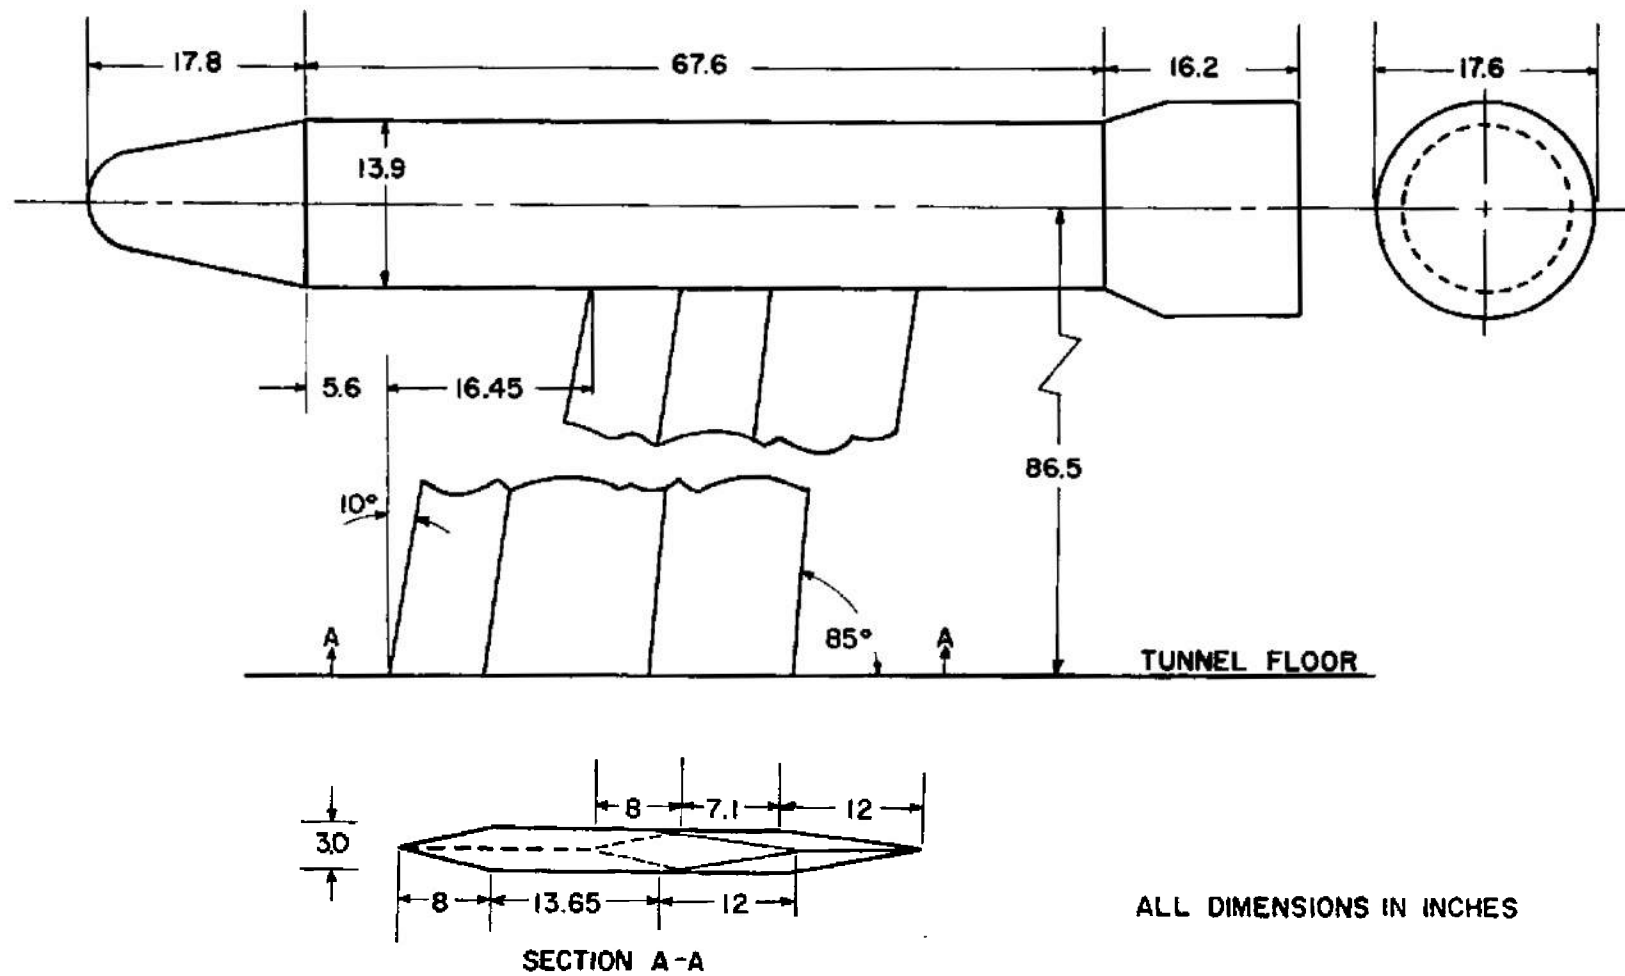



Fig. 1 Model Centerbody Dimensions



a. Ballute

Fig. 2 Location of Model in Test Section

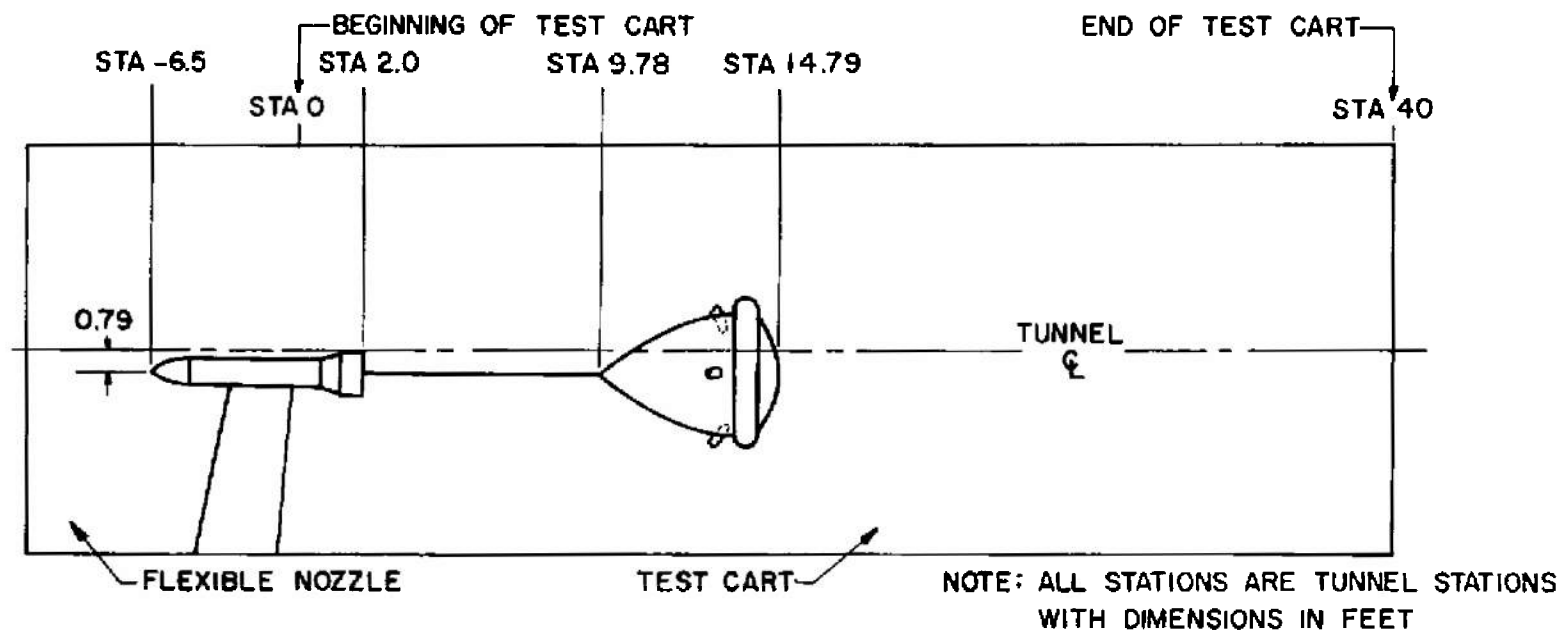

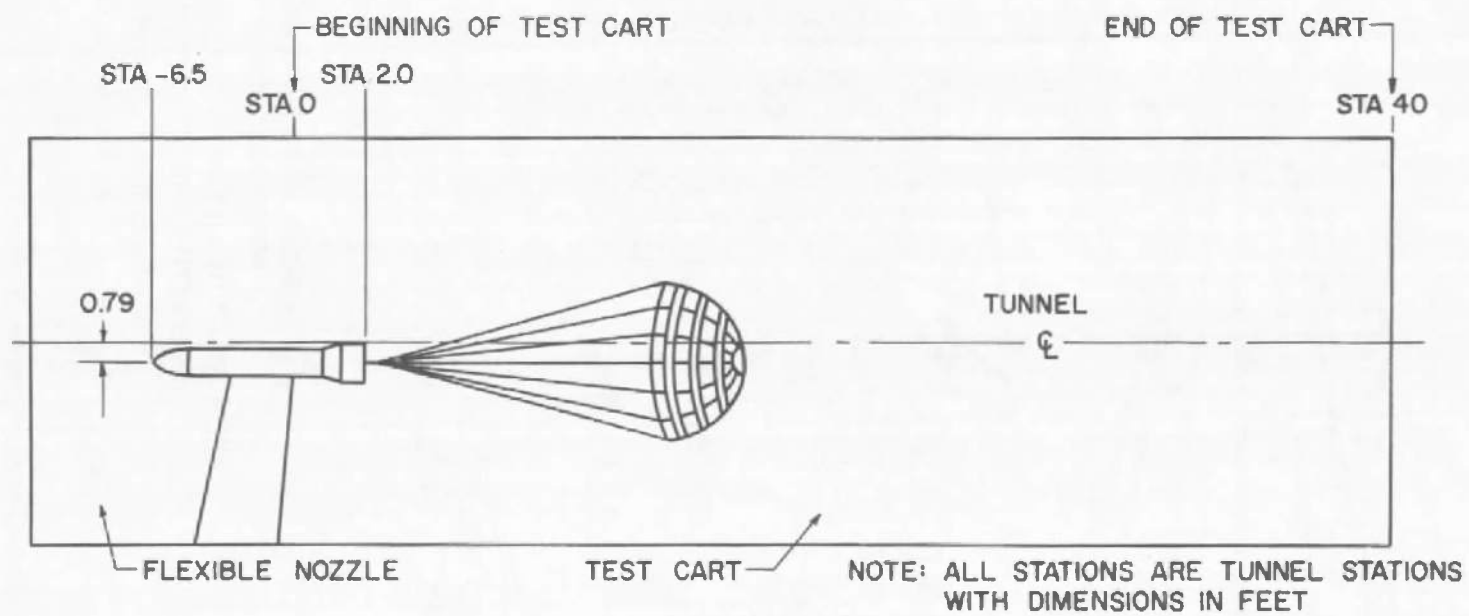

b. Parachute  
Fig. 2 Concluded

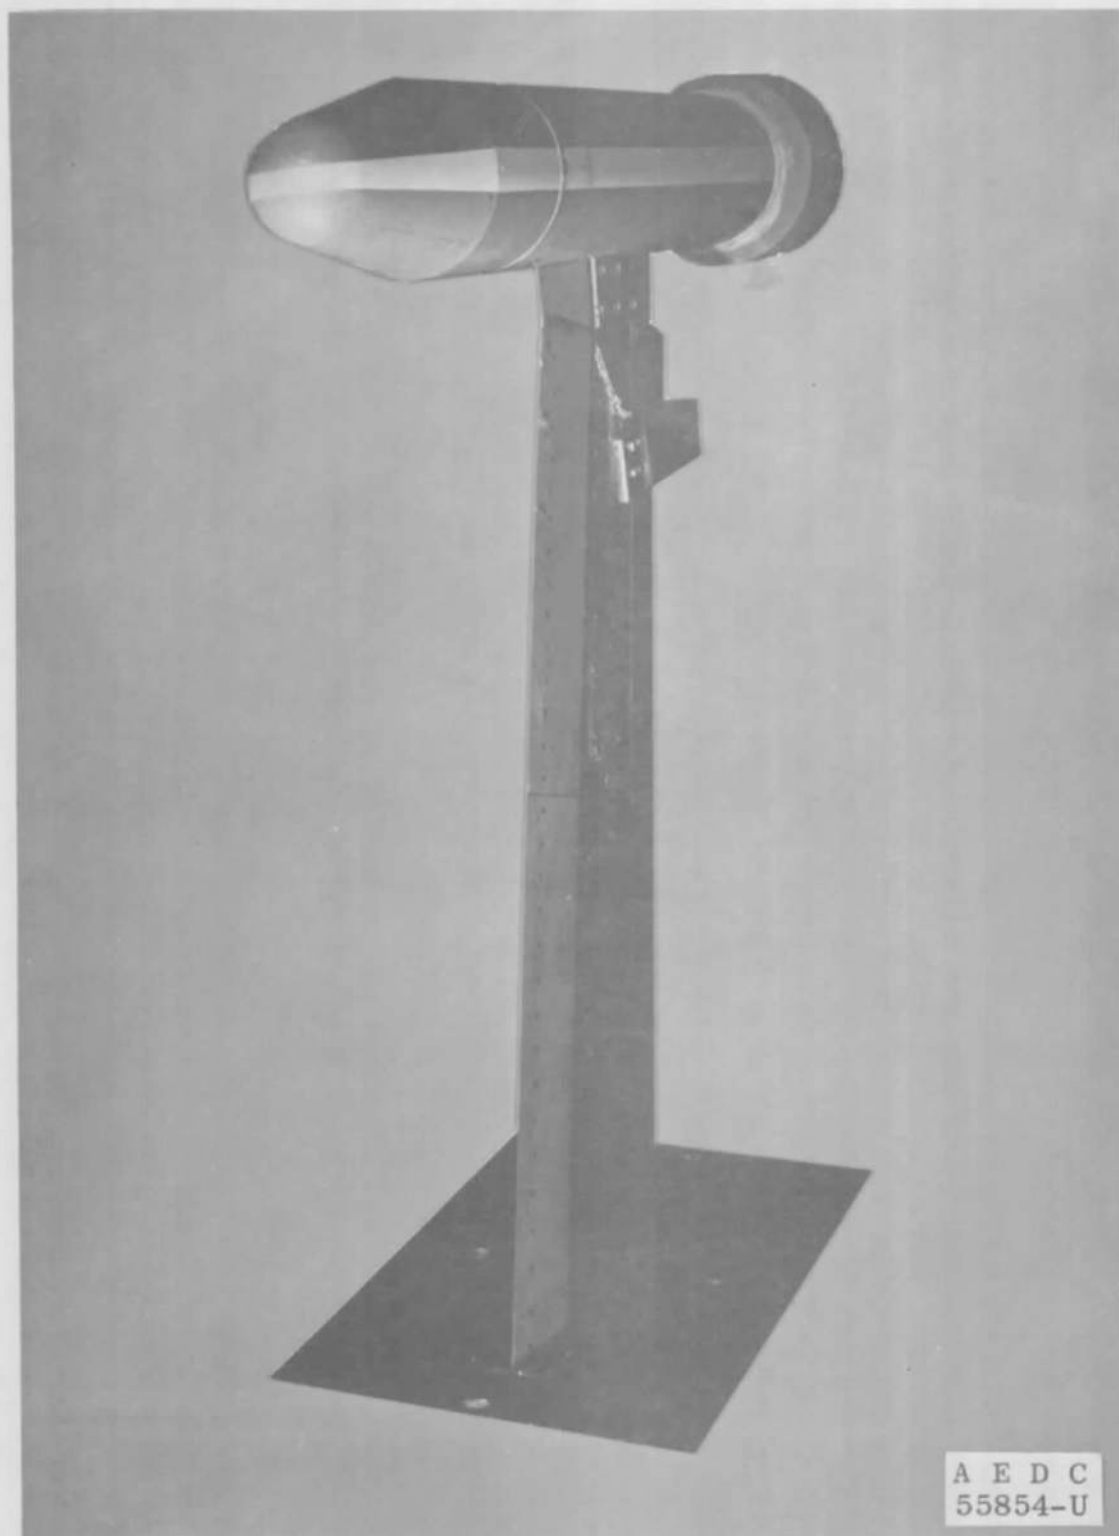


Fig. 3 Installation of Model Centerbody in Test Section



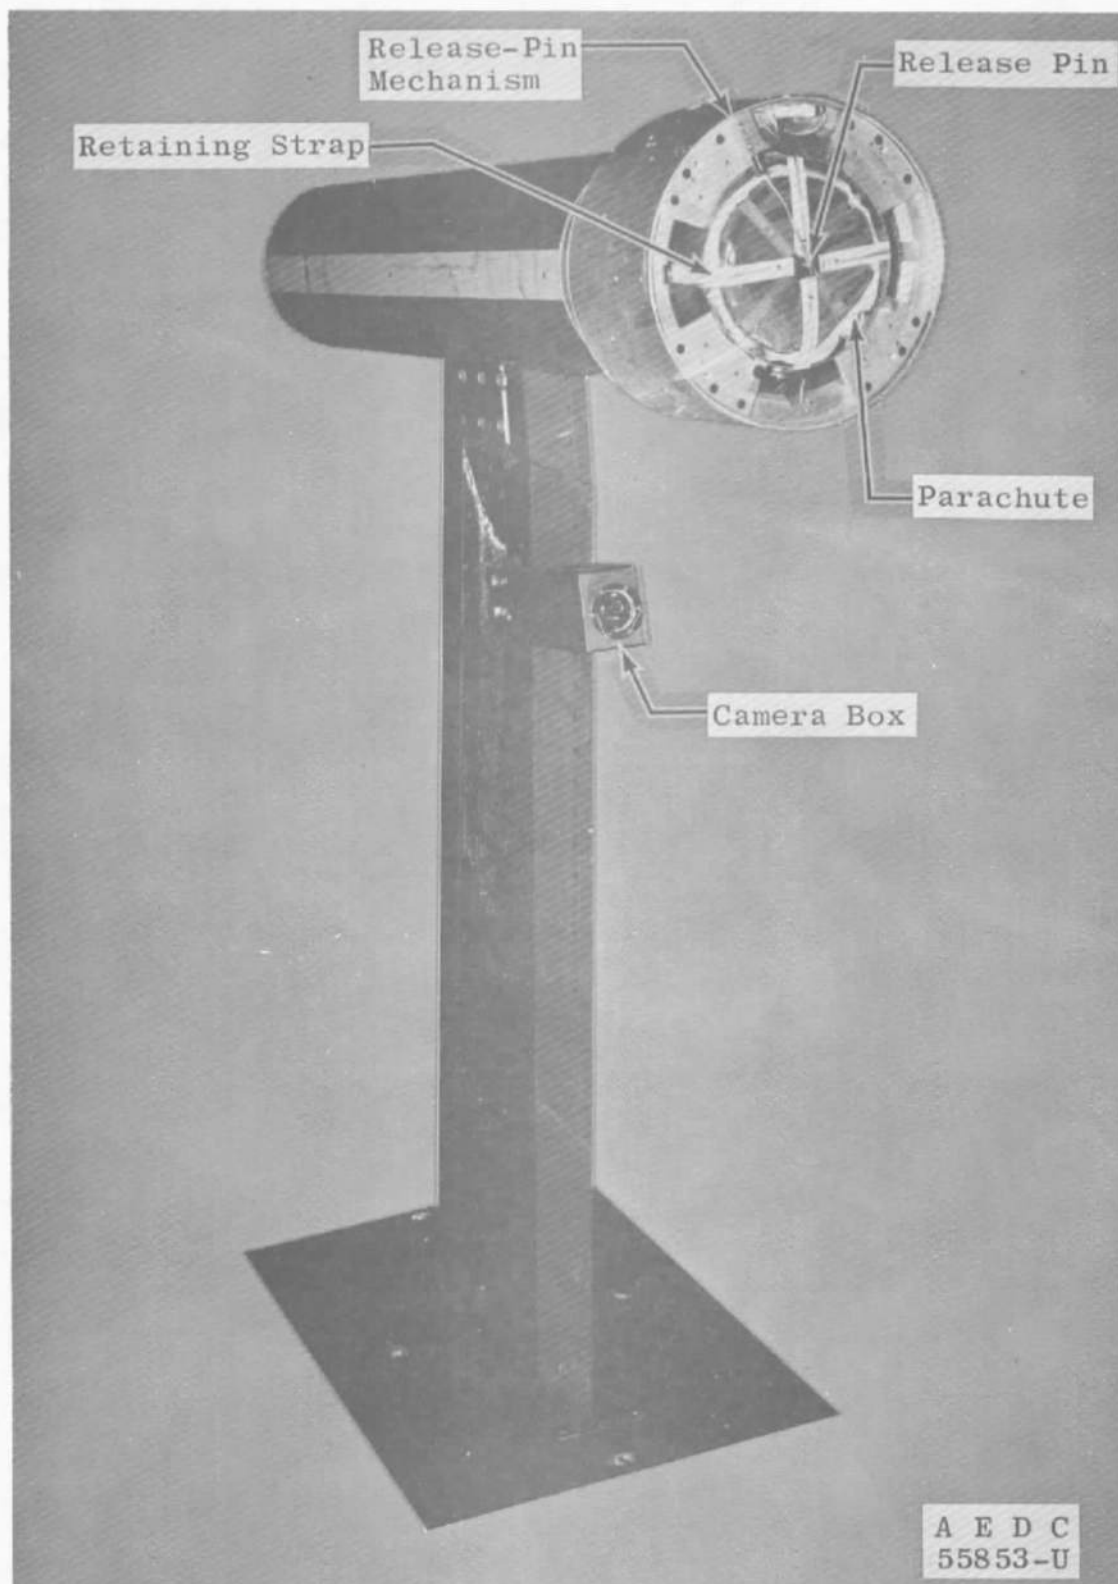



Fig. 4 Three-Quarter Rear View of Model Centerbody

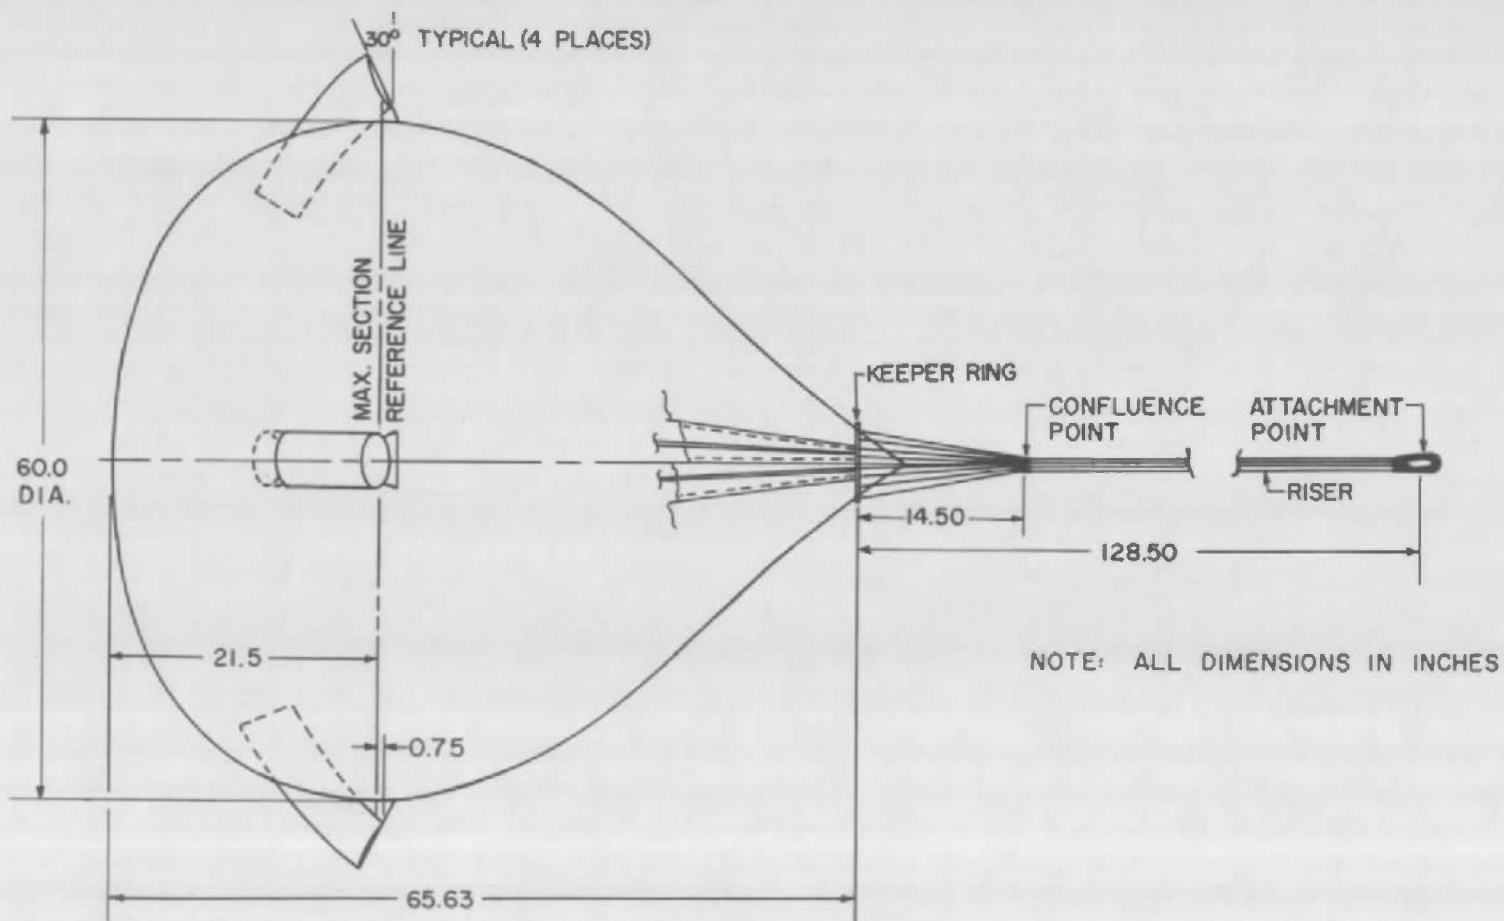

a. Metal Ballute  
Fig. 5 Ballute Details

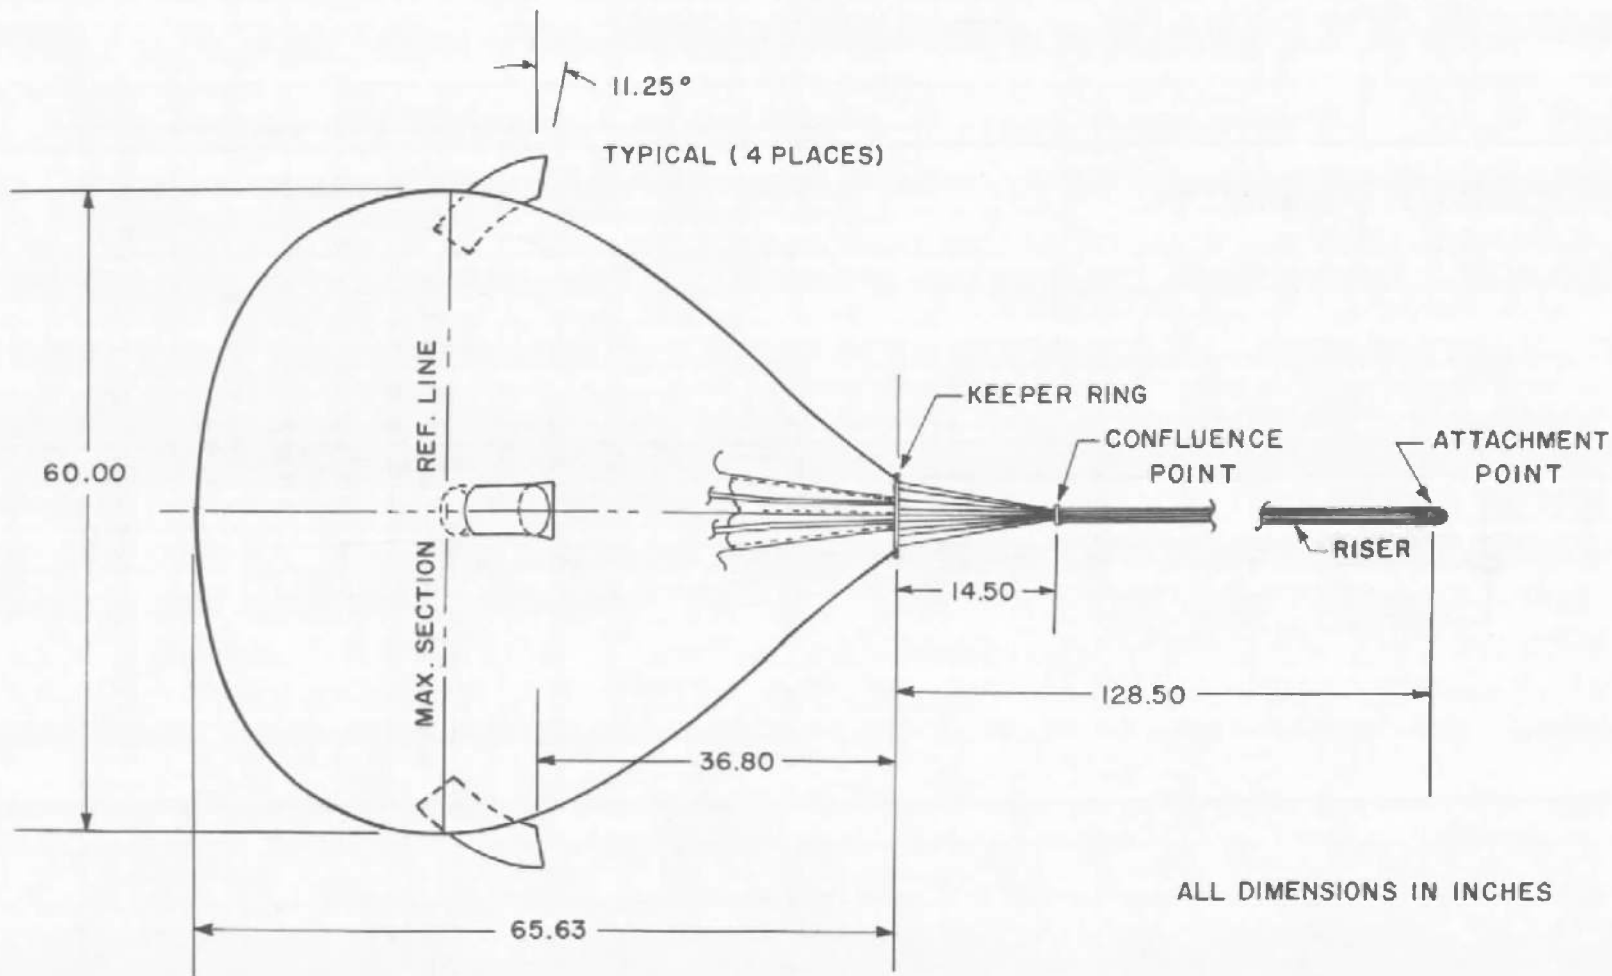

b. Cloth Ballute  
Fig. 5 Continued

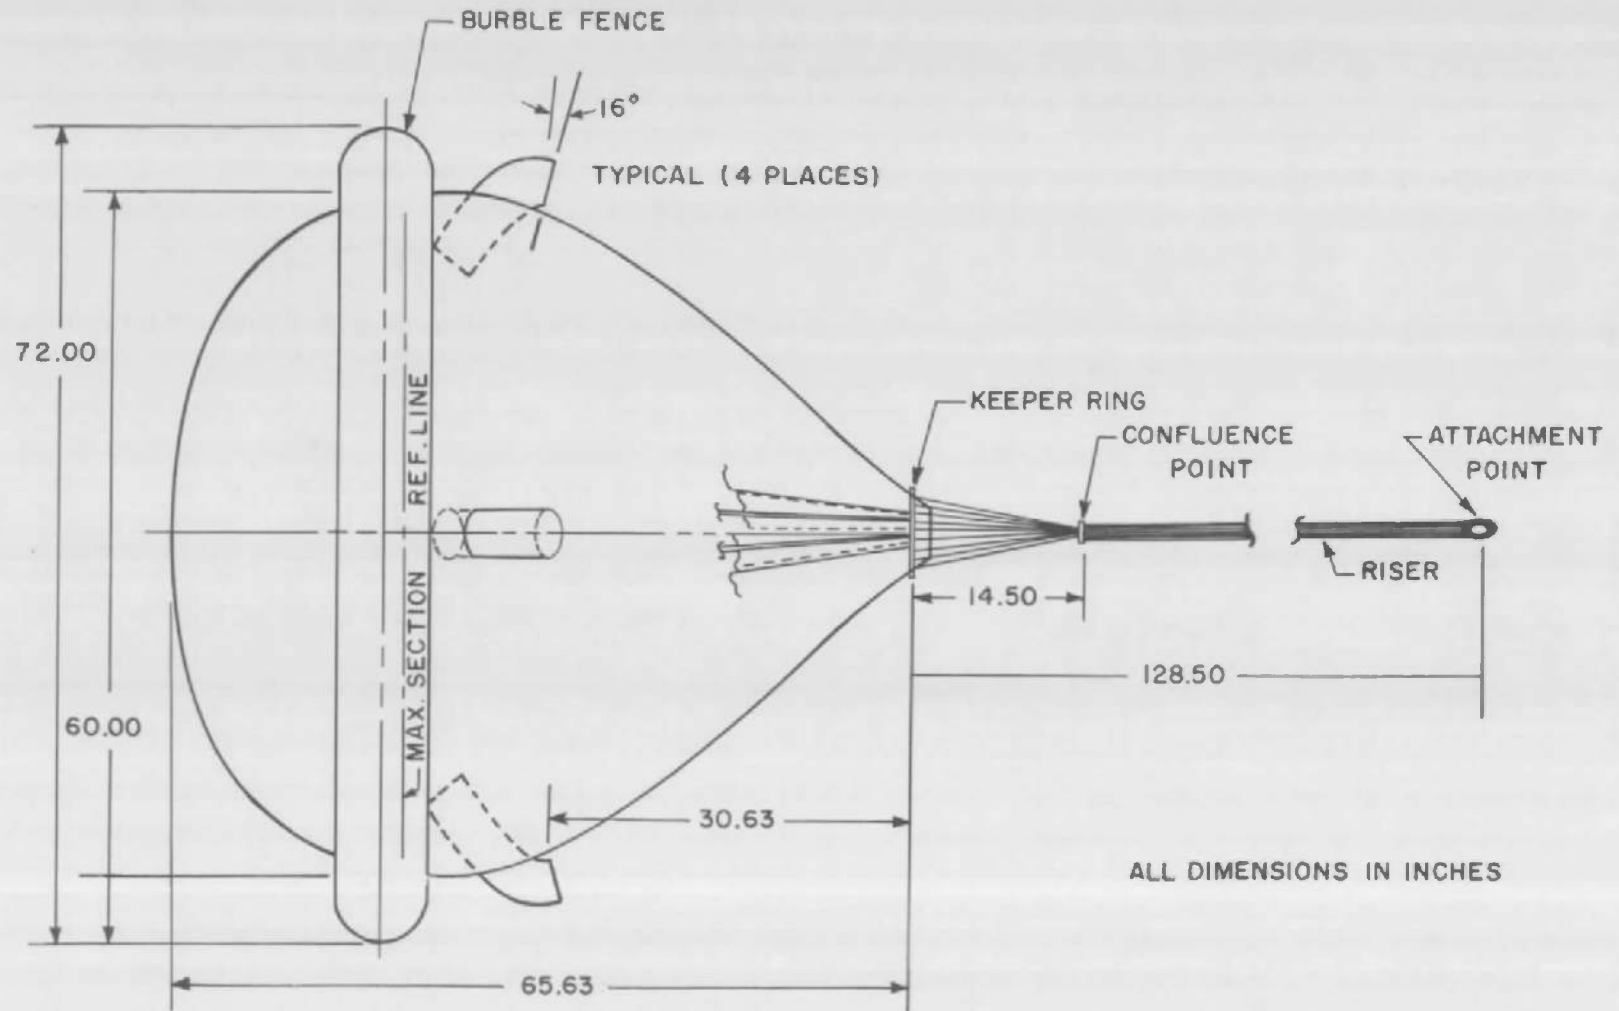

c. Cloth Ballute with Burble Fence  
Fig. 5 Concluded


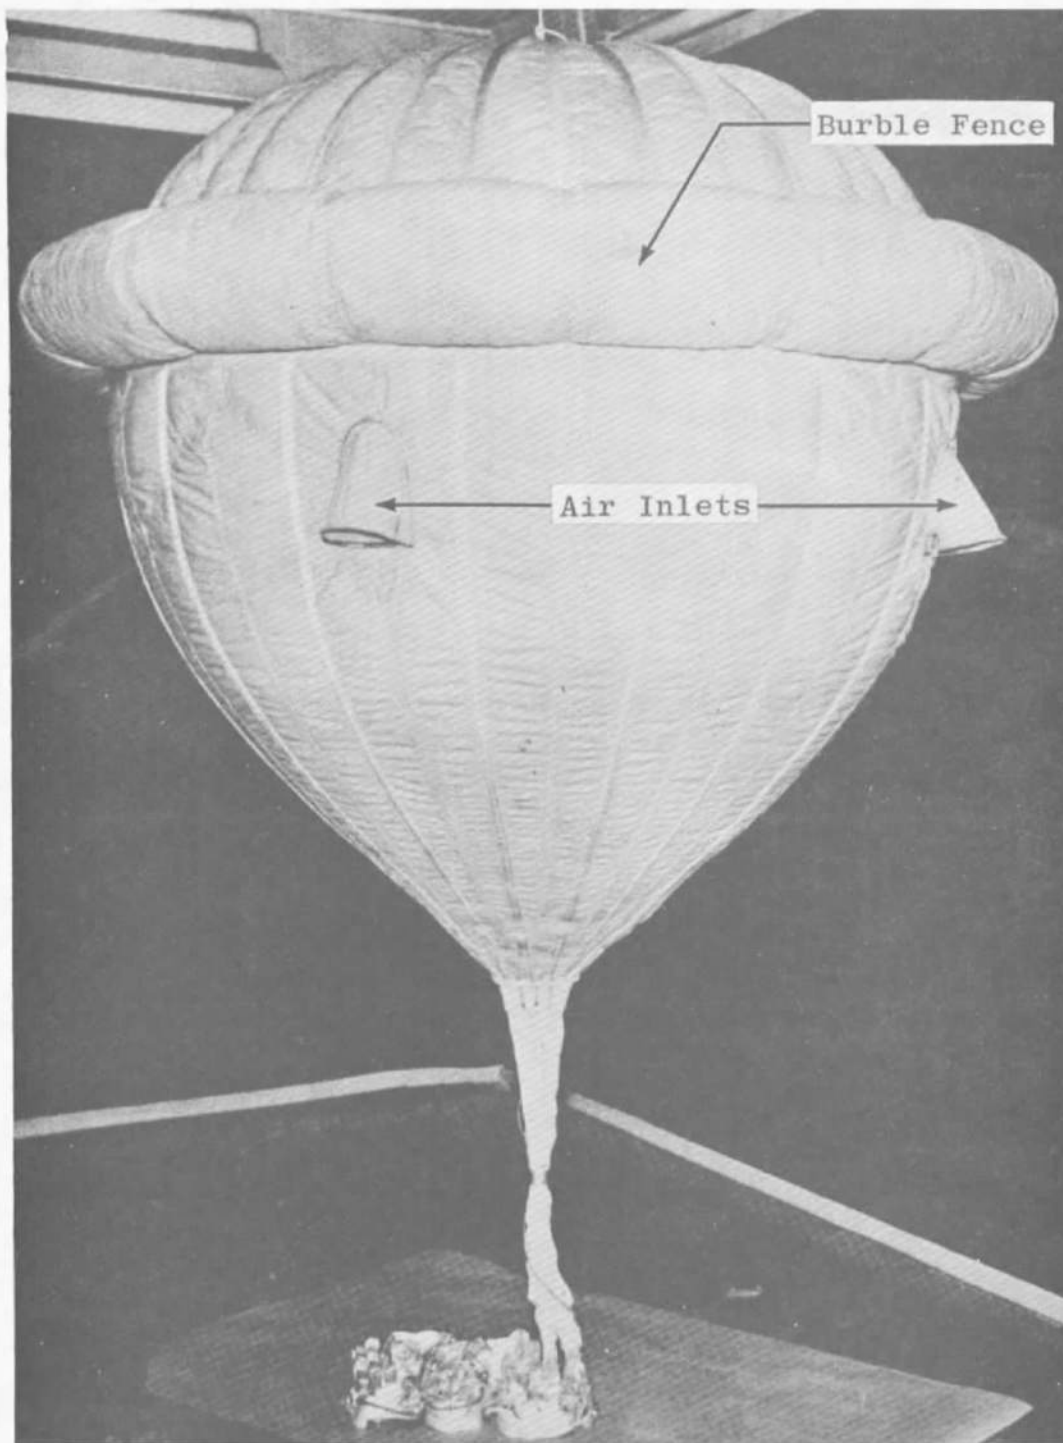


Fig. 6 Cloth Ballute with Burble Fence

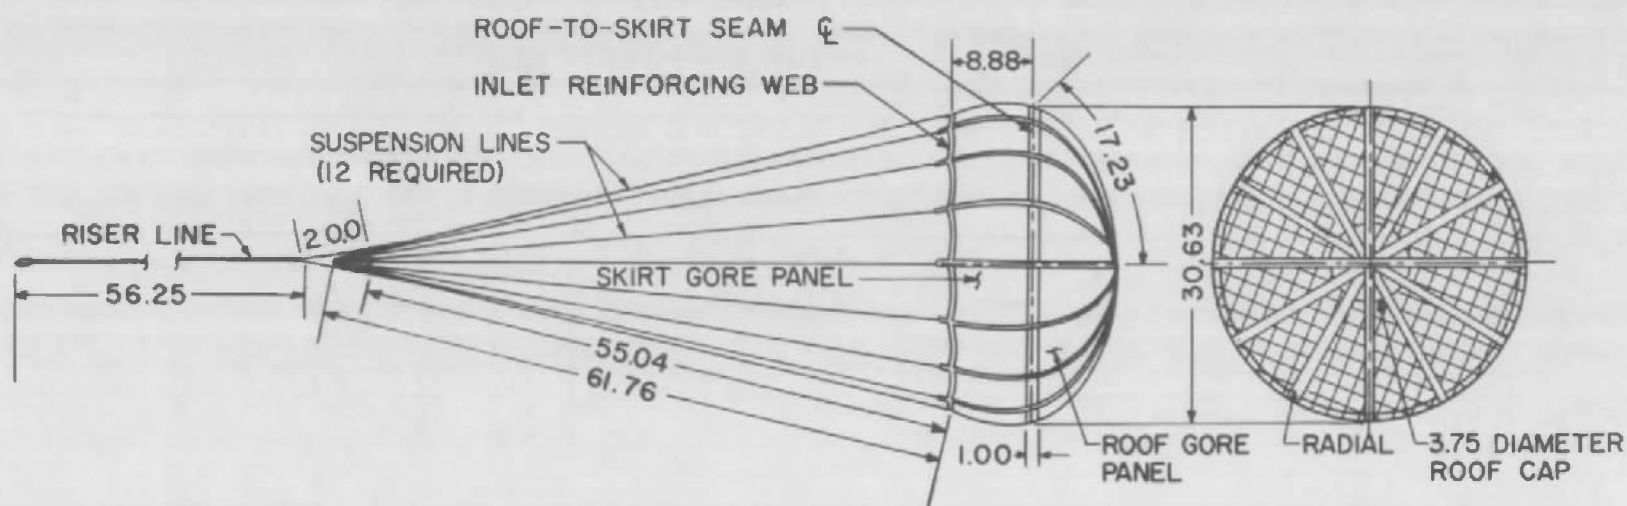

NOTE: ALL DIMENSIONS IN INCHES  
S.A.= SEAM ALLOWANCE

DISTANCE AFT OF CENTERBODY  
BASE PLANE TO CONFLUENCE  
POINT = 3.25 FEET

#### GORE COORDINATES

X	Y
0	0
3.06	0.84
6.12	1.70
9.19	2.60
12.25	3.52
15.32	4.36
16.54	4.59
18.38	4.84
20.03	4.91
21.44	4.78
22.16	4.56
22.94	4.24
23.46	3.97
24.00	3.71
24.53	3.58
25.11	3.57


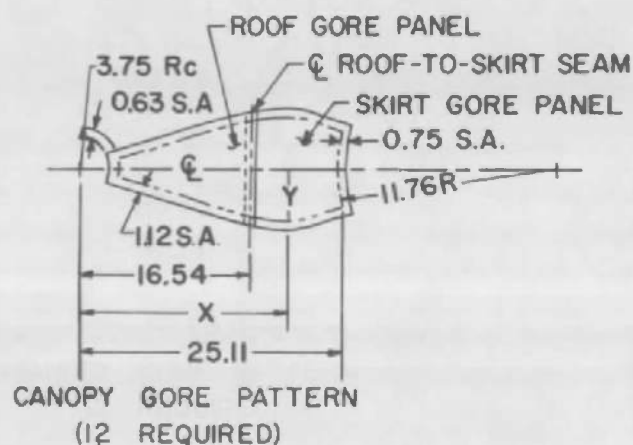


Fig. 7 Parasonic Parachute Details



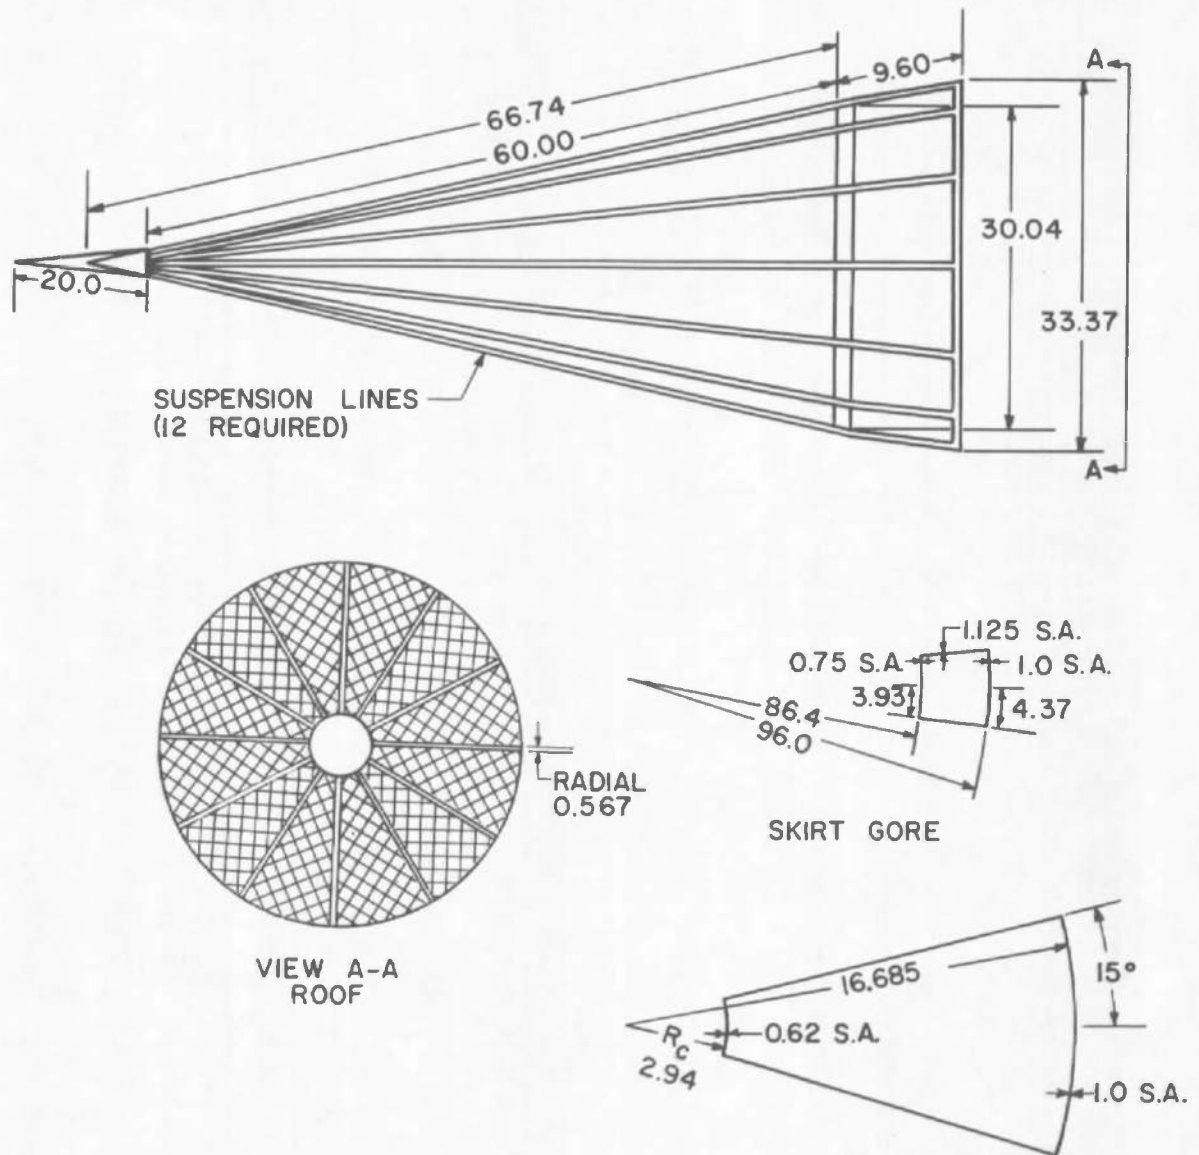

NOTES: ALL DIMENSIONS IN INCHES  
 S.A. = SEAM ALLOWANCE  
 RISER LINE LENGTH = 48.70 INCHES  
 DISTANCE AFT OF CENTERBODY  
 BASE PLANE CONFLUENCE  
 POINT = 2.63 FEET

Fig. 8 Hyperflo Parachute Details



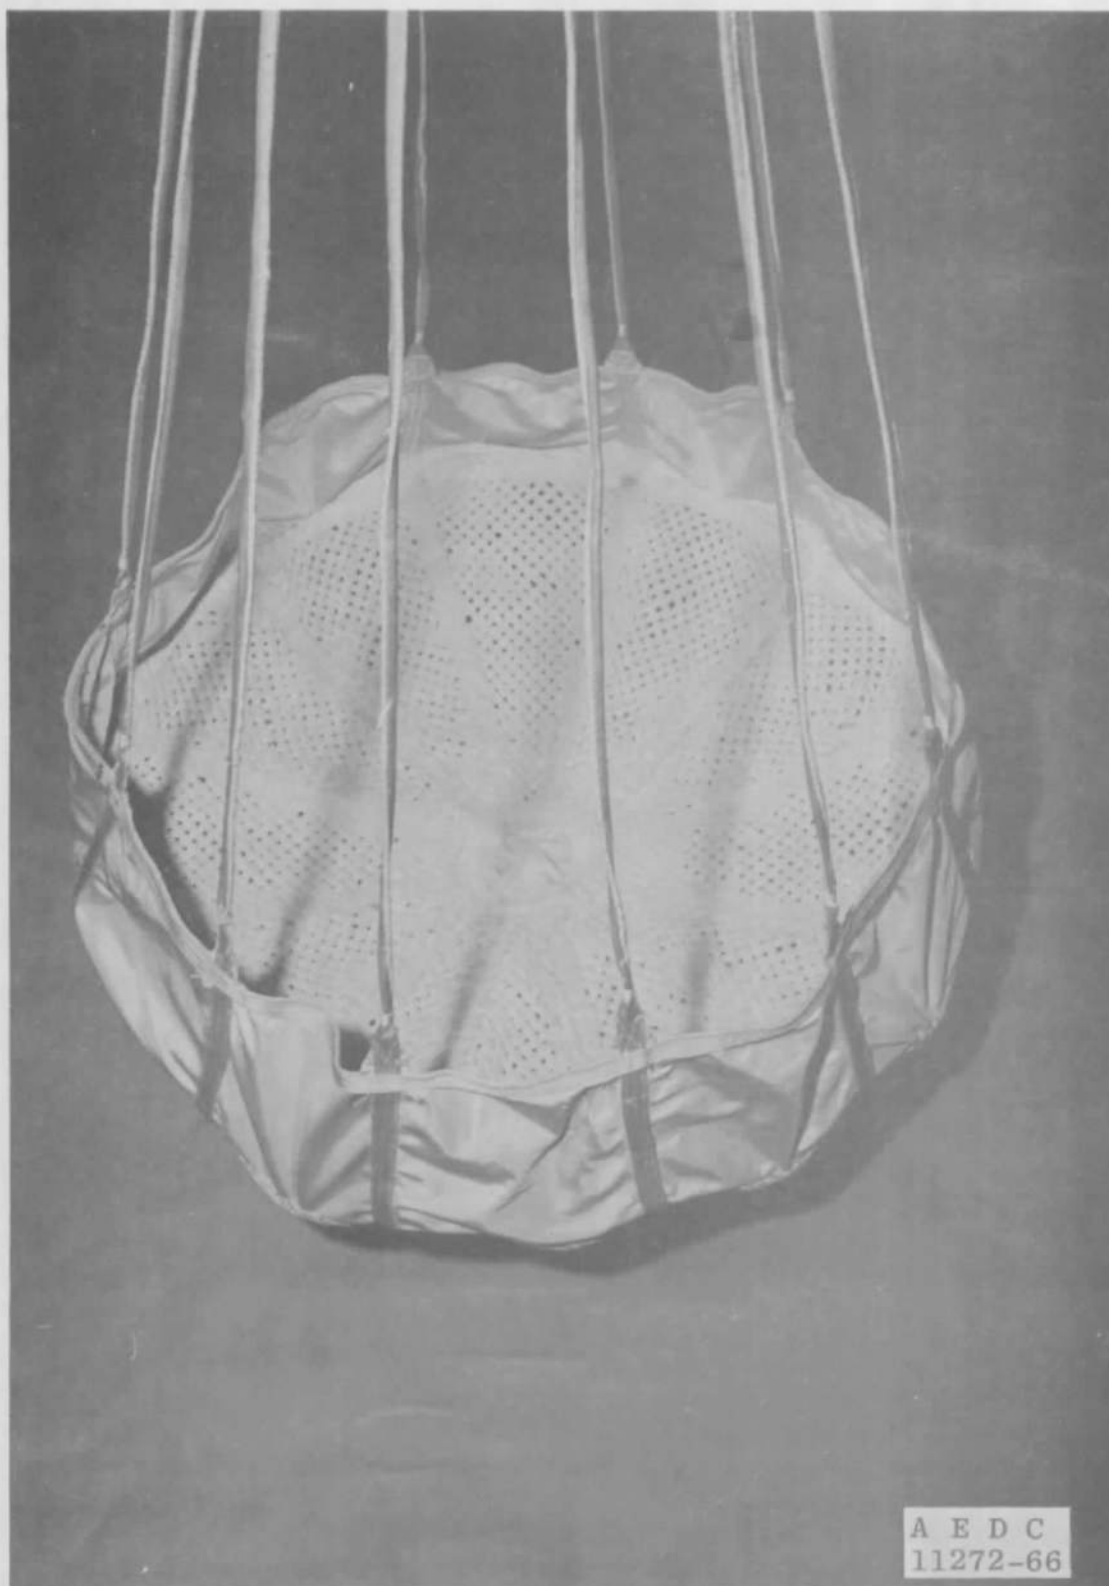


Fig. 9 Hyperflo Parachute

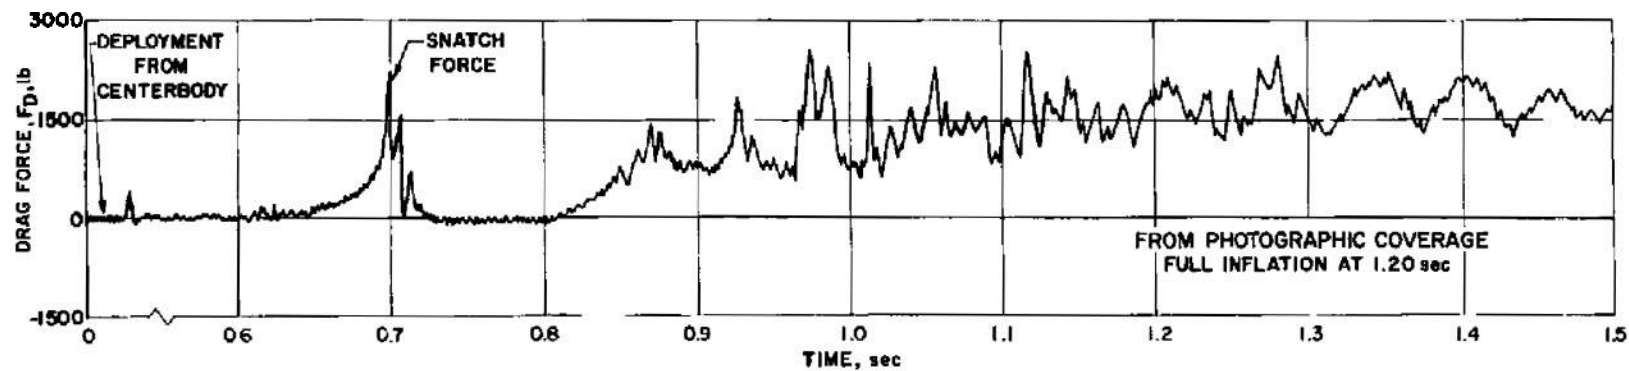


a. Metal Ballute

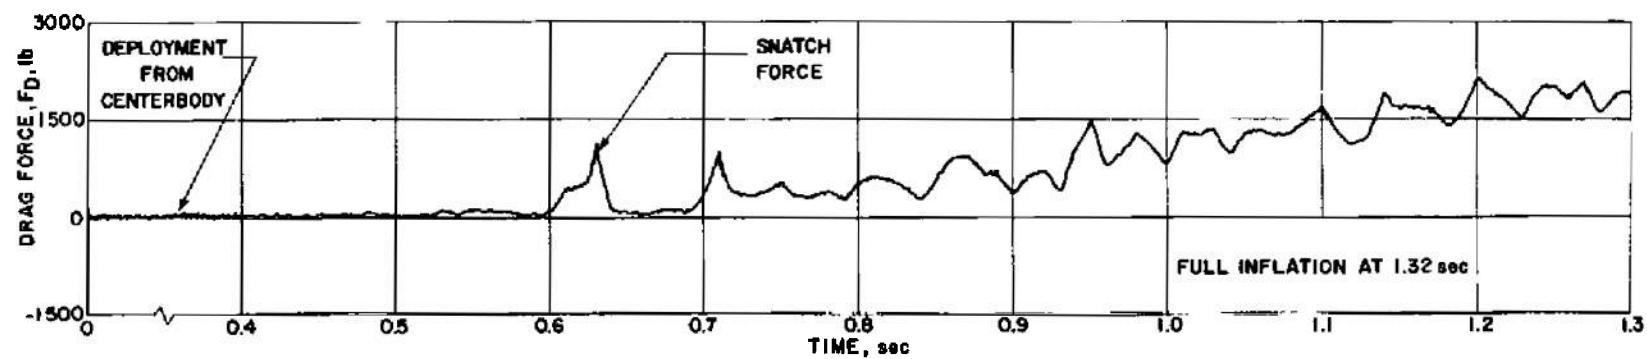


b. Cloth Ballute

Fig. 10 Decelerator Deployment Characteristics

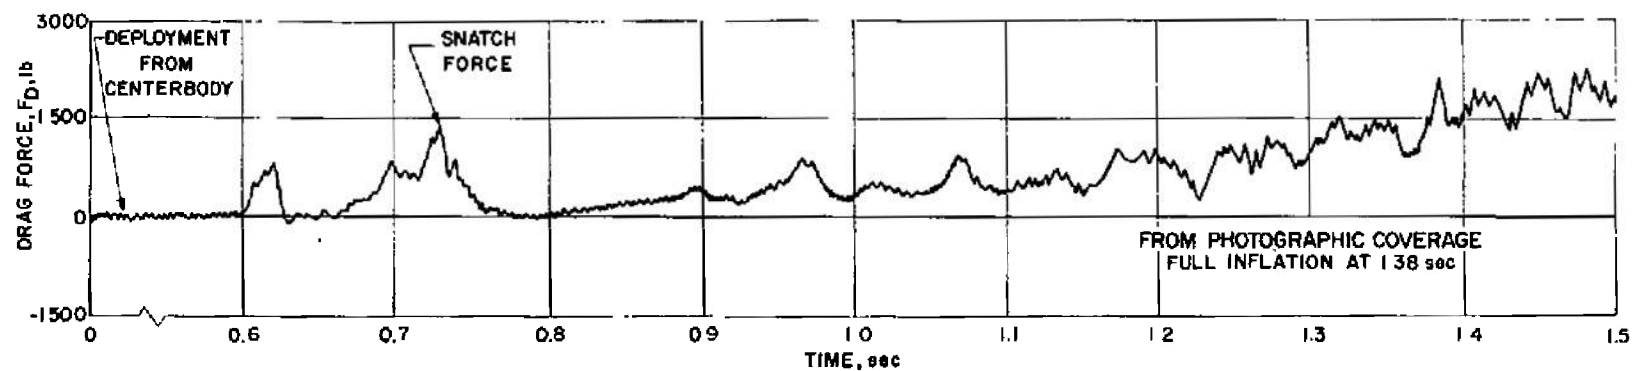

c. Cloth Ballute with a Burble Fence

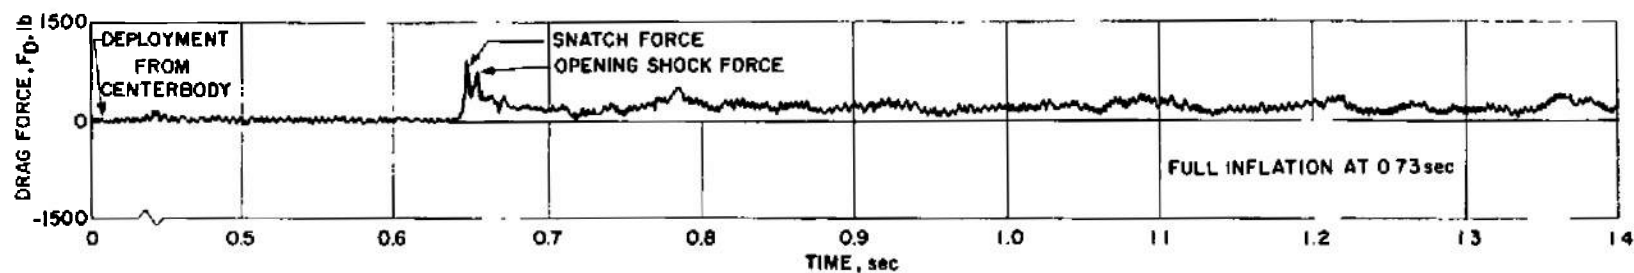d. Parasonic Parachute  
Fig. 10 Concluded

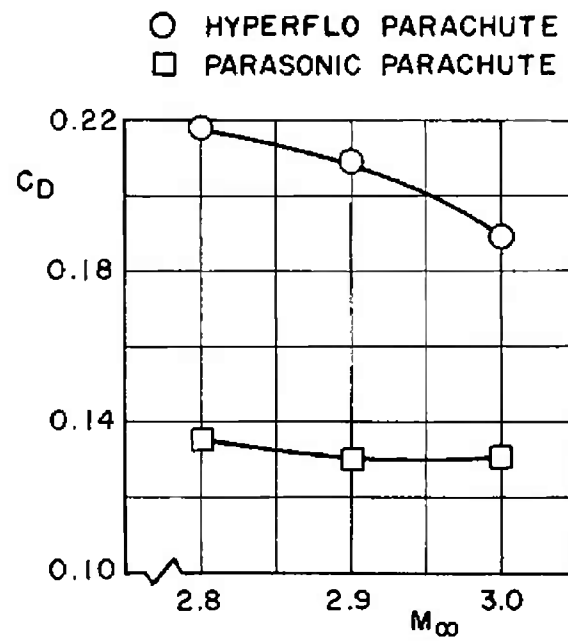


Fig. 11 Effect of Mach Number on Parachute Drag Coefficient

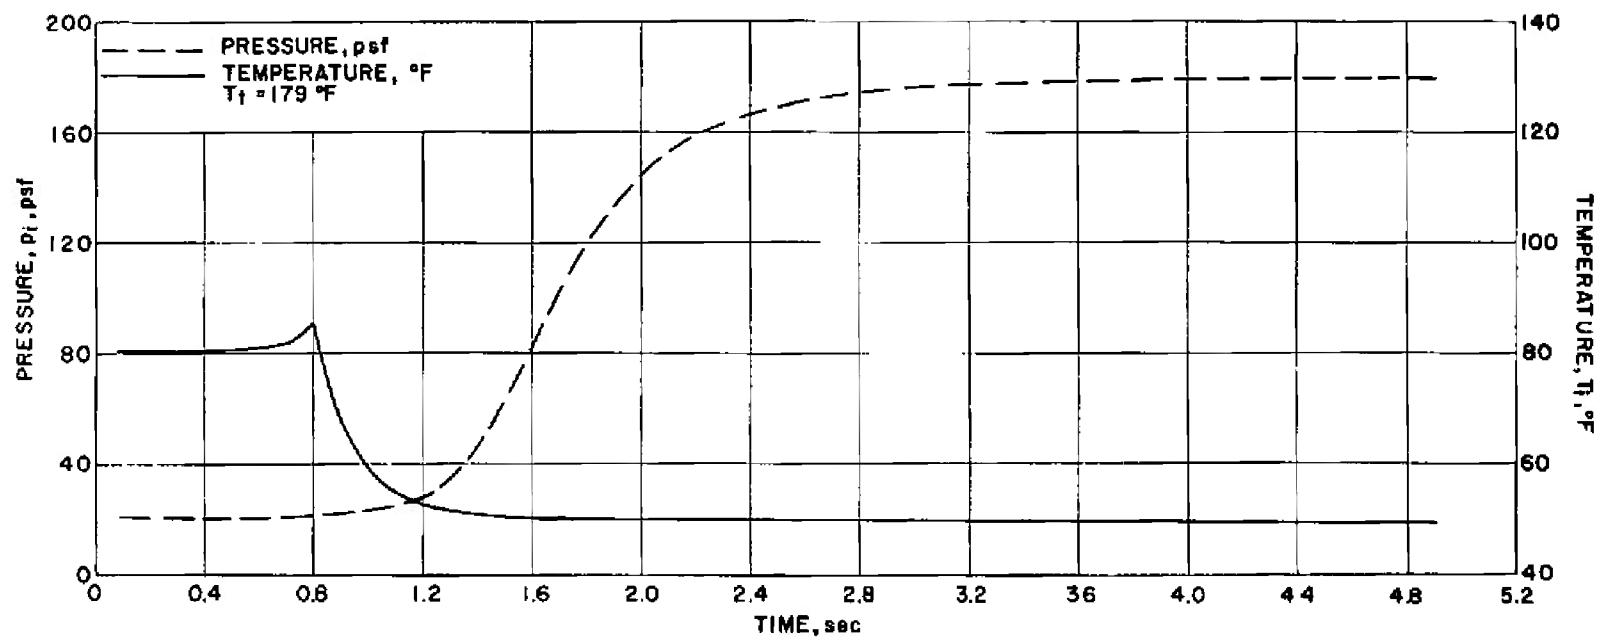


Fig. 12 Pressure-Time and Temperature-Time Histories for the Metal Ballute

**TABLE I**  
**SUMMARY OF TEST CONDITIONS AND RESULTS**

<u>Configuration</u>	<u>M<sub>0</sub></u>	<u>q<sub>0</sub>, psfa</u>	<u>Decelerator Diameter, ft</u>		<u>Canopy Total Porosity, percent</u>	<u>C<sub>D0</sub></u>	<u>Area Ratio, Δ<sub>i</sub>/Δ<sub>c</sub></u>	<u>Maximum Angle of Oscillation about Base Attachment Point, ±deg*</u>	<u>Time from Deployment Initiation to Full Inflation, sec*</u>	<u>Time from Full Line Extension to Full Inflation, sec*</u>
Metal Ballute	2.8	120	5		-	0.718	-	0	1.20	0.40
Cloth Ballute with Bumble Fence	2.8	120	6		-	0.689	-	0	1.38	0.77
Cloth Ballute	2.8	120	5		-	0.733	-	0	1.32	0.60
Parasonic Parachute	2.8	120		4	5.0	0.135	7.0	7.0	0.73	0.016
	2.9					0.130		4.5		
	3.0					0.131		8.0		
Hyperflo	2.8	120		4	5.6	0.218	7.0	17.0	No deployment data obtained	
Parachute	2.9					0.209		-		
with Reefer	3.0					0.188		-		

\*These data were obtained from photographic coverage.

## DOCUMENT CONTROL DATA - R&amp;D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1 ORIGINATING ACTIVITY (Corporate author) Arnold Engineering Development Center ARO, Inc., Operating Contractor Arnold Air Force Station, Tennessee		2a REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b GROUP N/A	
3 REPORT TITLE AN INVESTIGATION OF VARIOUS TYPES OF DECELERATORS AT MACH NUMBER 2.8			
4 DESCRIPTIVE NOTES (Type of report and inclusive dates) N/A			
5 AUTHOR(S) (Last name, first name, initial) MacLanahan, D. A., Jr., ARO, Inc.			
6 REPORT DATE July 1966		7a TOTAL NO OF PAGES 29	7b NO OF REFS 1
8a CONTRACT OR GRANT NO AF40(600)-1200 b PROJECT NO 6065 c Program Element 62405364 d.		9a ORIGINATOR'S REPORT NUMBER(S) AEDC-TR-66-136 9b OTHER REPORT NO(S) (Any other numbers that may be assigned this report) N/A	
10 AVAILABILITY/LIMITATION NOTICES <del>Qualified users may obtain copies of this report from DDC. Release to foreign governments and foreign nationals must have prior approval of AFEDL.</del>			
11 SUPPLEMENTARY NOTES N/A		12 SPONSORING MILITARY ACTIVITY Air Force Flight Dynamics Lab., Air Force Systems Command, Wright-Patterson AFB, Ohio	
13 ABSTRACT  A test was conducted in the 16-ft supersonic wind tunnel to obtain deployment and steady-state drag, inflation, and stability characteristics of a metal ballute, a cloth ballute, a cloth ballute with a burble fence, a parasonic parachute, and a hyperflo parachute. All decelerators were tested at a Mach number of 2.8 at a dynamic pressure of 120 psfa. The data obtained show that a method of pre-inflation utilizing a methyl alcohol/water solution reduced the time required for the drag load to reach the steady-state value. This reduction of time permitted the metal ballute to attain full inflation.			

This document has been approved for public release  
its distribution is unlimited.

PER TAB 74-26,  
DTC 20 DEC, 1974



14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
supersonic flow decelerators ballutes parachutes hyperflo parasonic drag inflation stability pre-inflation						

## INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.